

POSSIBILITIES UNLIMITED

**TURTLE**<sup>®</sup>  
POWER TOOLS & ACCESSORIES

[www.turtletools.co.in](http://www.turtletools.co.in)

**TURTLE**<sup>®</sup>  
POWER TOOLS & ACCESSORIES

PRODUCTS CATALOGUE



**ST-301 (4" Angle Grinder)**

Max Disc Diameter	100 mm
Rated Input Power	900 W
No-Load Speed	12000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Special



**ST-302 (4" Angle Grinder)**

Max Disc Diameter	100 mm
Rated Input Power	900 W
No-Load Speed	12000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Special



**ST-303 (4" Angle Grinder)**

Max Disc Diameter	100 mm
Rated Input Power	750 W
No-Load Speed	11000 rpm
Rated Frequency	50 Hz
Rated Voltage	230 V
Common Model	6-100



**ST-304 (4" Angle Grinder)**

Max Disc Diameter	100 mm
Rated Input Power	860 W
No-Load Speed	11000 rpm
Rated Frequency	50 Hz
Rated Voltage	230 V
Common Model	801



**ST-305 (4" Angle Grinder)**

Max Disc Diameter	100 mm
Rated Input Power	860 W
No-Load Speed	10000 rpm
Rated Frequency	50 Hz
Rated Voltage	230 V
Common Model	9523



**ST-351 (5" Angle Grinder)**

Max Disc Diameter	125 mm
Rated Input Power	1200 W
No-Load Speed	8500 rpm
Rated Frequency	50 Hz
Rated Voltage	230 V
Common Model	G15SA2



**ST-371 (7" Angle Grinder)**

Max Disc Diameter	180 mm
Rated Input Power	2200 W
No-Load Speed	8500 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	G18SE3



**ST-331 (Die Grinder)**

Dia. of Collet	25 mm
Rated Input Power	400 W
No-Load Speed	24000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-332 (Die Grinder)**

Dia. of Collet	25 mm
Rated Input Power	550 W
No-Load Speed	26700 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-341 (Straight Grinder)**

Max Wheel Diameter	125 mm
Rated Input Power	800 W
No-Load Speed	5000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-361 (7" Polisher)**

Max Disc Diameter	180 mm
Rated Input Power	1200 W
No-Load Speed	0-3000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	9227C



**ST-701  
(10mm Electric Drill)**

Drill Diameter	10 mm
Rated Input Power	350 W
No-Load Speed	2600 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	2310



**ST-702  
(13mm Impact Drill)**

Drill Diameter	13 mm
Rated Input Power	600 W
No-Load Speed	2900 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	EID-13



**ST-704  
(13mm Impact Drill)**

Drill Diameter	13 mm
Rated Input Power	950 W
No-Load Speed	0-3000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-705  
(10mm Variable R/F Drill)**

Drill Diameter	10 mm
Rated Input Power	600 W
No-Load Speed	0-2800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	2314



**ST-706  
(13mm Variable R/F Drill)**

Drill Diameter	13 mm
Rated Input Power	650 W
No-Load Speed	0-2800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	2313

# ELECTRIC DRILL / SCREW DRIVER / MARBLE CUTTER ROTARY HAMMER / DEMOLITION HAMMER

**TURTLE**<sup>®</sup>  
POWER TOOLS & ACCESSORIES



**ST-707 (13mm Impact Drill)**

Max. Drill Capacity	13 mm
Rated Input Power	600 W
No-Load Speed	0-2800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	13RE



**ST-708 (13mm Electric Drill)**

Max. Drill Capacity	13 mm
Rated Input Power	550 W
No-Load Speed	1200 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	DU10



**ST-710 (6.5mm Electric Drill)**

Max. Drill Capacity	6.5 mm
Rated Input Power	300 W
No-Load Speed	4500 rpm
Rated Frequency	50 Hz
Rated Voltage	230 V
Common Model	Regular



**ST-751 (10mm Screw Driver)**

Drill Diameter	10 mm
Rated Input Power	280 W
No-Load Speed	0-750 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-716 (16mm Drill Machine)**

Max. Drilling Diameter	16 mm
Rated Input Power	950 W
No-Load Speed	1200 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-761 (Cordless Screw Driver)**

Max. Diameter	10 mm
Battery Voltage	12 V
Battery Capacity	1.3 Ah
No-Load Speed	0-400 rpm
	0-1350 rpm
Common Model	Regular



**ST-401 (4" Marble Cutter)**

Blade Diameter	110 mm
Cutting Capacity	30 mm
Rated Input Power	1200 W
No-Load Speed	11000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	CM45A



**ST-402 (4" Marble Cutter)**

Blade Diameter	110 mm
Cutting Capacity	30 mm
Rated Input Power	1240 W
No-Load Speed	11000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	CM45B



**ST-451 (5" Marble Cutter)**

Blade Diameter	125 mm
Cutting Capacity	42 mm
Rated Input Power	1400 W
No-Load Speed	14000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	CM5



**ST-461 (6" Marble Cutter)**

Blade Diameter	150 mm
Cutting Capacity	50 mm
Rated Input Power	1450 W
No-Load Speed	7300 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	CM6



**ST-471 (7" Marble Cutter)**

Blade Diameter	180 mm
Cutting Capacity	60 mm
Rated Input Power	1900 W
No-Load Speed	5000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-501 (26mm Rotary Hammer)**

Max Drill Diameter	26 mm
Rated Input Power	900 W
No-Load Speed	800 rpm
Rated Frequency	50-60 Hz
Rated Voltage	220 V
Common Model	43-26 Regular



**ST-502 (5Kg Demolition Hammer)**

Impact Energy	9 J
Rated Input Power	950 W
Impact Rate at Rated Speed	2900 bpm
Rated Frequency	50-60 Hz
Rated Voltage	220 V
Common Model	810



**ST-503 (16Kg Demolition Hammer)**

Impact Energy	45 J
Rated Input Power	1650 W
Impact Rate at Rated Speed	1400 bpm
Rated Frequency	50-60 Hz
Rated Voltage	220 V
Common Model	PH-65



**ST-504 (11Kg Demolition Hammer)**

Rated Input Power	1500 W
Rated Impacting Frequency	900-1890 bpm
Rated Frequency	50 Hz
Rated Voltage	230 V
Common Model	11E



**ST-505 (11Kg Demolition Hammer)**

Impact Energy	66 J
Rated Input Power	1050 W
Impact Rate at Rated Speed	2000 bpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	25901 Special





**ST-506  
(20mm Rotary Hammer)**

Max Drill Diameter	20 mm
Rated Input Power	500 W
No-Load Speed	0-850 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	2-20



**ST-507  
(26mm Rotary Hammer)**

Max Drill Diameter	26 mm
Rated Input Power	950 W
No-Load Speed	0-900 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	2-26



**ST-508  
(28mm Rotary Hammer)**

Max Disc Diameter	28 mm
Rated Input Power	1050 W
No-Load Speed	0-1300 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	2-26



**ST-512 (Max Chisel)  
(5Kg Demolition Hammer)**

Chisel Type	SDS Max
Impact Energy	9J
Rated Input Power	950 W
Impact Rate at	2900 bpm
Rated Speed	
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	810 Max Chisel



**ST-801 (Electric Planner)**

Planing Width	82 mm
Rated Input Power	600 W
No-Load Speed	16000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	F20 Allu. Body



**ST-802 (Electric Planner)**

Planing Width	82 mm
Rated Input Power	720 W
No-Load Speed	16000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	1900B Pla. Body



**ST-811 (Electric Router)**

Chuck Diameter	6-12 mm
Rated Input Power	1850 W
No-Load Speed	23000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	3612



**ST-821 (16" Ele. Chain Saw)**

Skid Length	405 mm
Rated Input Power	1400 W
No-Load Speed	400 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	5016



**ST-822 (16" Ele. Chain Saw)**

Skid Length	405 mm
Rated Input Power	1600 W
No-Load Speed	400 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Heavy 5016



**ST-823 (18" Ele. Chain Saw)**

Skid Length	455 mm
Rated Input Power	2000 W
No-Load Speed	400 rpm
Rated Voltage	220 V
Common Model	Special



**ST-824 (20" Ele. Chain Saw)**

Skid Length	505 mm
Rated Input Power	2200 W
No-Load Speed	400 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Special



**ST-831  
(22" Petrol Chain Saw)**

Blade Length	22"
Displacement	58 cc
Max. Cutting Diameter	550 mm
Common Model	Regular



**ST-832  
(22" Petrol Chain Saw)**

Blade Length	22"
Displacement	58 cc
Max. Cutting Diameter	550 mm
Common Model	Heavy Regular



**ST-833  
(18" Petrol Chain Saw)**

Blade Length	18"
Displacement	52 cc
Max. Cutting Diameter	450 mm
Common Model	Regular



**ST-871 (7" Circular Saw)**

Blade Diameter	185 mm
Rated Input Power	1050 W
No-Load Speed	4700 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	C7



**ST-872 (9" Circular Saw)**

Blade Diameter	235 mm
Rated Input Power	1750 W
No-Load Speed	5000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	C9



# CUT-OFF MACHINE / MITER SAW / HOT AIR GUN BENCH GRINDER / JIG SAW / VIBRATOR / SANDER TRIMMER

**TURTLE**<sup>®</sup>  
POWER TOOLS & ACCESSORIES



**ST-602**  
**(14" Cut-off Machine)**

Max. Disc Diameter	355 mm
Rated Input Power	2300 W
No-Load Speed	3800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-603**  
**(14" Cut-off Machine)**

Max. Disc Diameter	355 mm
Rated Input Power	2600 W
No-Load Speed	3800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	LG355



**ST-605**  
**(14" Cut-off Machine)**

Max. Disc Diameter	355 mm
Rated Input Power	2300 W
No-Load Speed	3800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-618**  
**(14" Cut-off Machine)**

Max. Disc Diameter	355 mm
Rated Input Power	2800 W
No-Load Speed	3800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	DW918



**ST-101 (10" Miter Saw)**

Max. Disc Diameter	255 mm
Rated Input Power	1800 W
No-Load Speed	4800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	DW913A



**ST-921 (Hot Air Gun)**

Rated Input Power	500 W
Air Flow Volume	300-500 °C
Temperature	280-480 L/min
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-931 (8" Bench Grinder)**

Max. Disc Diameter	200 mm
Rated Input Power	350 W
No-Load Speed	2950 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-932 (6" Bench Grinder)**

Max. Disc Diameter	150 mm
Rated Input Power	350 W
No-Load Speed	2950 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-941 (Jig Saw)**

Max. Cutting Capacity	70 mm
Rated Input Power	740 W
No-Load Speed	0-3000 rpm
Rated Frequency	50 Hz
Rated Voltage	230 V
Common Model	Regular



**ST-942 (Jig Saw)**

Cutting Capacity (Wood)	50 mm
Rated Input Power	500 W
No-Load Speed	4400 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-951 (Electric Vibrator)**

Holder Size	35 mm
Needle Size	1.5 m x 35 mm
Rated Input Power	750 W
No-Load Speed	1300 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-955 (Heavy Vibrator)**

Holder Size	50 mm
Needle Size	3.5 m x 50 mm
Rated Input Power	2000 W
No-Load Speed	4800 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Special



**ST-961 (Orbital Sander)**

Pad Size	93 x 185 mm
Rated Input Power	260 W
No-Load Speed	10000 bpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-962 (Orbital Sander)**

Pad Size	100 x 110 mm
Rated Input Power	200 W
No-Load Speed	14000 bpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-981 (Wood Trimmer)**

Diameter of Collet	6.35 mm
Rated Input Power	400 W
No-Load Speed	35000 bpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-965 (Belt Sander)**

Belt Speed	500 m/min
Belt Size	100 x 610 mm
Rated Input Power	1200 W
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-003 (Blower Cum Vacuum)**

Rated Input Power	1200 W
No-Load Speed	0-1600 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Air Volume	5.0 m <sup>3</sup> /min
Common Model	Regular



**ST-004 (Leaf Blower)**

Rated Input Power	3000 W
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-005 (Electric Blower)**

Rated Input Power	600 W
No-Load Speed	18000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Blowing Rate	2.5 m <sup>3</sup> /min
Common Model	Regular



**ST-006 (Electric Blower)**

Rated Input Power	850 W
No-Load Speed	13000 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Blowing Rate	2.8 m <sup>3</sup> /min
Common Model	Eletrex

### Vacuum Cleaner

Mod :	ST-201	ST-202	ST-203	ST-204
Capacity	20 L	25 L	35 L	60 L
Rated Input Power	800 W	1200 W	1450 W	1800 W
Rated Frequency	50 Hz	50 Hz	50 Hz	50 Hz
Rated Voltage	230 V	230 V	230 V	230 V
Common Model	Regular	Regular	Regular	Regular



### Impact Wrench

Mod :	ST-1110	ST-1112	ST-1120	ST-1122
Rated Input Power	300 W	340 W	360 W	620 W
No Load Speed	1800 rpm	1800 rpm	1700 rpm	1700 rpm
Rated Impact Frequency	2000	2000	1800	1600
Capacity Bolt Size	M-8-10	M-8-12	M-12-20	M-16-22
Common Model	Regular	Regular	Regular	Regular



### Magnetic Drill

Mod :	ST-5101	ST-5102	ST-5103	ST-5104
Drilling Range	28 mm	38 mm	68 mm	98 mm
Rated Input Power	1450 W	1620 W	1720 W	2080 W
No Load Speed	300 rpm	650 rpm	580 rpm	520 rpm
Magnetic Adhesion	13800N	14500N	15800N	16800N
Rated Frequency	50 Hz	50 Hz	50 Hz	50 Hz
Rated Voltage	220 V	220 V	220 V	220 V



### Diamond Core Drill

Mod :	ST-5201	ST-5202	ST-5203	ST-5204
Drilling Range	15-90mm	15-150mm	15-205mm	15-405mm
Rated Input Power	1350 W	1800 W	3650 W	4980 W
No Load Speed	1800 rpm	1600 rpm	700 rpm	580 rpm
Rated Frequency	50 Hz	50 Hz	50 Hz	50 Hz
Rated Voltage	220 V	220 V	220 V	220 V



**ST-491 (Wall Chaser)**

Max Cutting Width	30 mm
Max Cutting Depth	35 mm
Rated Input Power	2800 W
No-Load Speed	1900 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Special



**ST-771 (Paint Mixture)**

Max. Drilling Diameter	150 mm
Rated Input Power	900 W
No-Load Speed	550 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**ST-772 (Paint Mixture)**

Rated Input Power	1600 W
No-Load Speed	550 rpm
Rated Frequency	50 Hz
Rated Voltage	220 V
Common Model	Regular



**Chain Block**

1 Ton to 10 Ton with  
3m, 6m and 8m Chain Length



**Electric Hoist**

0.5 Ton to 5 Ton



**Lever Type Chain Block**

0.75 Ton to 6 Ton



**Gear Trolley for Chain Block**

1 Ton to 5 Ton



**Plain Trolley Without Chain**

1 Ton to 5 Ton




**Chains**

6 mm, 8 mm, 10 mm Load Chain  
and 4.5 mm Pulling Chain



**Polyester Flat Webbing Sling  
(S.F. 5:1)**

1 Ton to 12 Ton and 1 m to 10 m

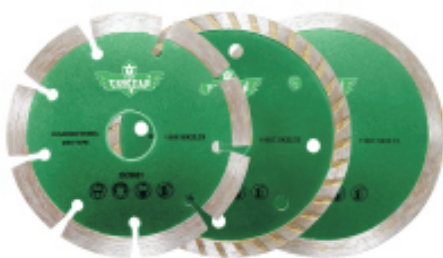

**Marble Blade**

4" to 24"  
(Dry, Wet and Turbo)



**Diamond Cup Wheel**

3" to 7"  
(Segment, Rim and Turbo)



**TCT Saw Blade**

4" to 14"  
(Wood and Alluminium)





### Chisels

SDS Plus (14 mm), SDS Hex (17 mm)  
SDS Max (18 mm), PH65 (30 mm)  
all Size Length in Point and Flat




### SDS Plus Hammer Drill Bits

4 mm to 32 mm  
SDS Max Available



### SDS Plus Hammer Drill Bits (Cross Tips)

4 mm to 32 mm

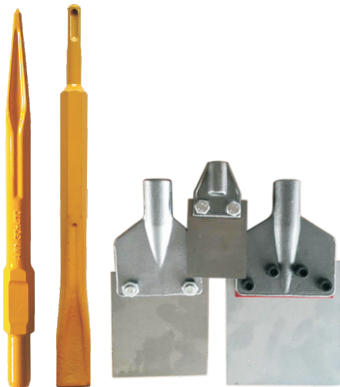

### Gold Chisels (Spring Steel) Tiles Remover Chisels

SDS Plus (14 mm), SDS Hex (17 mm)  
SDS Max (18 mm), PH65 (30 mm)  
all Size Length in Point and Flat



### Machining Taps

All Size in mm and Inch



### HSS Drill Bits (Streight Shank)

2mm, to 14 mm and 1/16" to 3/4"



### M2 High Quality HSS Drill Bits

2mm, to 14 mm and 1/16" to 3/4"



### HSS Drill Bits (Taper Shank)

12.5 mm to 32.5 mm and 7/16" to 2"



### Masonry Drill Bits

3 mm to 13 mm (1/8" to 1/2")



**Wood Flat Bit**

6 Pcs. Set and 10 mm to 50 mm



**Concret Hole Saw And Adaptor**

30 mm to 150 mm and  
22 x 110 to 22 x 1000



**Screw Driver Bits (PH-2)**

25 mm to 100 mm (+and-)



**Bi-Metal Hole Saw And Adaptor**

16 mm to 200 mm (Hex and SDS)



**Carbon Hole Saw Sets**

6 Pcs, 11 Pcs, 12Pcs and 16 Pcs



**HSS Drill Bit Sets**

13 Pcs. Set in Inch and MM



**Planner Blade-82 mm**

Suitable for F20 and 1900B



**Glass Hole Saw**

3 mm to 125 mm



**Glass Drill Bit**

3 mm to 16 mm




**Abrasive Wheels**

4" to 14" (Cutting Wheel)  
4" to 7" (Grinding Wheel)



**Flap Disc**


4" and 5" (All Grit)



**Abrasive Velcro Disc**



**Abrasive Fibre Disc**



**Flexible Polishing Pad**



**Felt Buffing Wheel**



**Non Woven Finishing Wheel**

4" to 14"



**Polishing Pad**

4" to 7"



**Polishing (Sanding) Pad**

4" to 7"





**Router Bits**



**Core Bits**



**Paint Mixture Rod**



**Chain and Guide Bar  
for Chain Saw**

16", 18", 20" and 22"  
(Electric & Gasoline)



**Wire Cup Brush**

3" and 4" (Crimped Wire and Twisted)



**Vibrator Needle**

1 Meter to 6 Meter



**HSS Hole Saw**

16 mm to 100 mm



**Magnetic Socket**

8 mm to 15 mm



**Auger Drill**

6 mm to 50 mm



**Drill Chuck**

6 mm to 16 mm (Threaded)  
10 mm to 20 mm (Taper)



**Drill Chuck Key**

10, 13 and 16 mm



**Link Rod (SDS Adaptor)**

3/8 - 24 UNF and 1/2 - 20 UNF



**Revolving Center**

MT - 2, MT - 3 and MT - 4



**Drill Sleeve**

MT - 2-3 and MT - 3-4



**Drill Chuck Arbor**

MT - 3 and MT - 4

### Power Tools Spare Parts

Armature, Stator, Gear, Spindle, Switch, Carbon Brush etc...

